
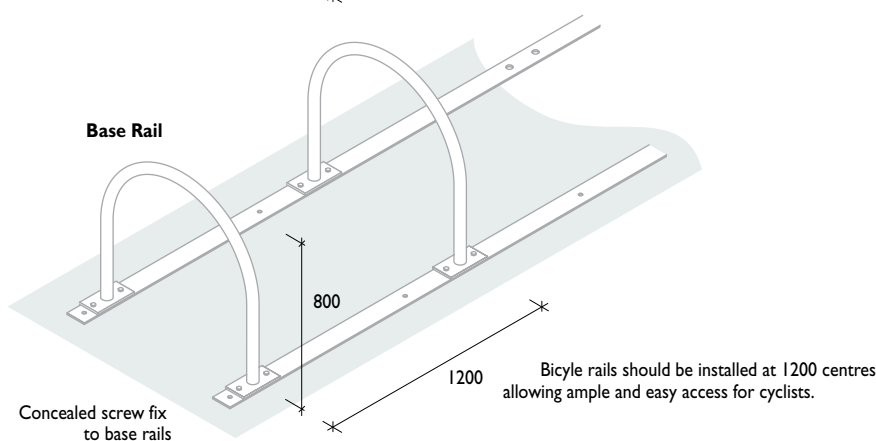
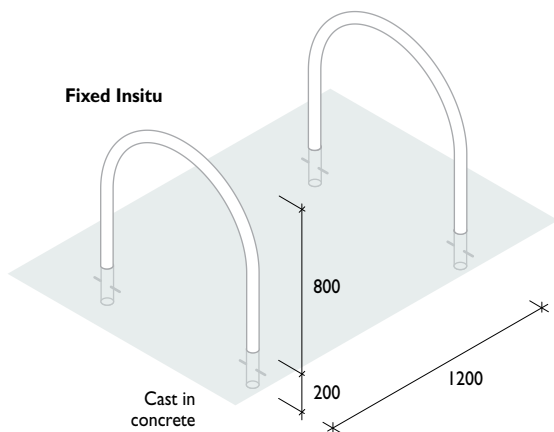


Most hitching rails are supplied complete with 200mm x 100mm rectangular base plates, allowing for installation by one of 3 methods:

- Bolt down using masonry anchors
- Fixed insitu (cast in)
- Connection to base rails

The main advantage of using the base rail system is that it eliminates the need for concrete footings and substantially reduces installation costs. It also allows the unit to be relocated with minimum effort and cost. Security is maintained by the overall weight of the combined system.

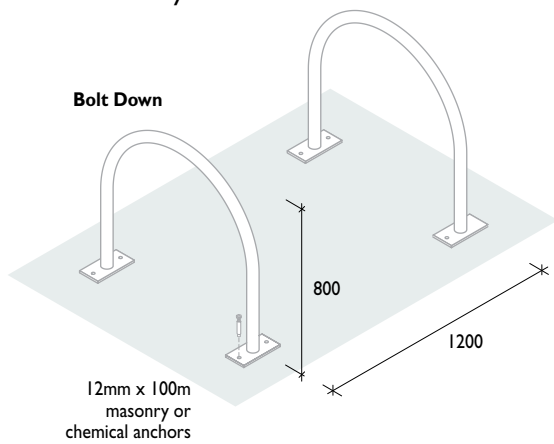

While bicycle hitching rails potentially provide parking for two bicycles (one either side), in practice they usually only achieve one bicycle per rail, as cyclists are often reluctant to secure their bicycle if another is already tethered to the rail.

General	4
Bicycle Facts	4
Design Guide	6
Installation	12
Consulting	13
Security Classes	14
Products	16
Rails	16
Racks	35
Repair Stations	65
End-of-Journey	70
Cages	84
Lockers	88
Shelters	98
Domestic	107
Scooters	113
Other	116
Clothes Lockers	122
Codes Index	130