


CSBR02F / B

Lincoln

An easy way of converting street-located car spaces to a parking facility of up to 8 bicycles. Ideal for local governments to provide temporary or permanent secure bicycle parking.




The fixed in situ (CSBR02F) model is best suited for permanent installations or in bitumen surfaces, while the base plate model (CSBR02B) can be bolted down onto concrete surfaces or footings.

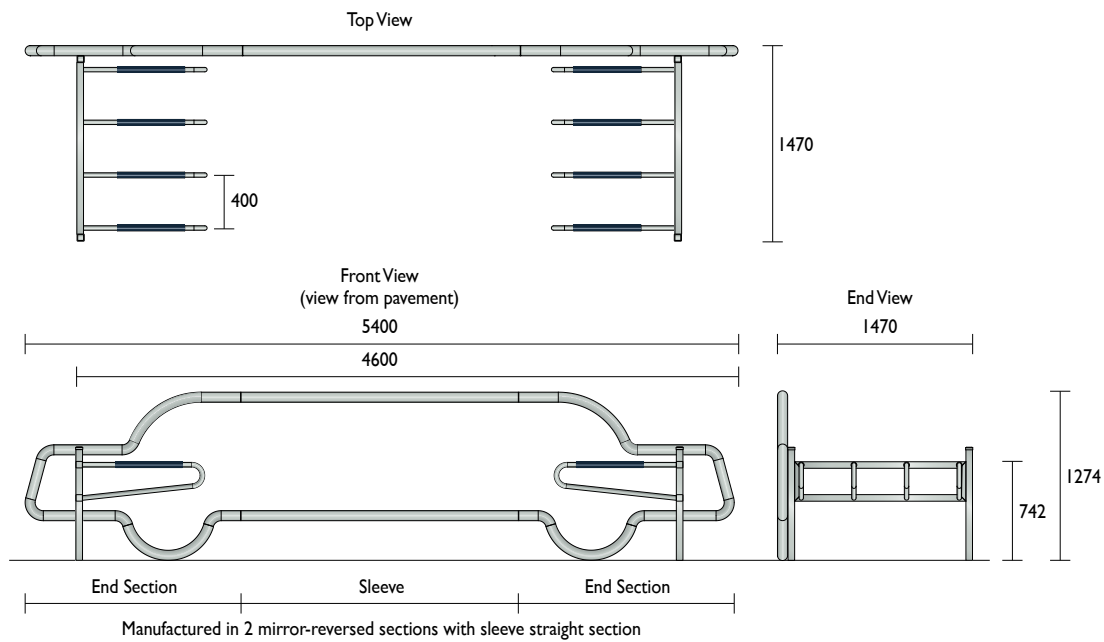

Standard Parking Spaces
5400 x 2400

Thoroughfare

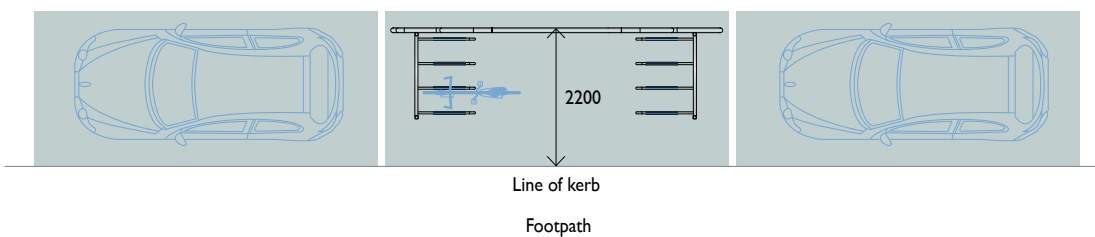

General	4
Bicycle Facts	4
Design Guide	6
Installation	12
Consulting	13
Security Classes	14
Products	16
Rails	16
Racks	35
Repair Stations	65
End-of-Journey	70
Cages	84
Lockers	88
Shelters	98
Domestic	107
Scooters	113
Other	116
Clothes Lockers	122
Codes Index	130

Material Specifications (General)

Rack 50 x 50 SHS Mild Steel / 32NB (38.1) x 1.6mm Pipe / Galvanised / Powder coated in a range of colours
 Profile 65NB (76.1) x 3.6mm Pipe / Galvanised / Powder coated in a range of colours

