

Industrial


RPGS

Fabrication


Frame
75 x 75 RHS



Frame
50 x 50 RHS




Viewed from secure side

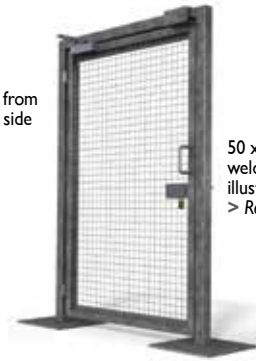

50 x 50 x 4 welded mesh illustrated
> Refer to p76 for options

Optional Disabled Access Kit

- Low energy (DDA compliant) 240V / 2.5A
- Complies with emergency exit requirements
- Controlled via a PLC
- Programmable to work with access control systems
- Other options include UPS function, electric locking and safety sensor.



Pavement Surface

Security

PSWS / PSWSC

Fabrication


Post / O/head Rail
75 x 75 RHS



Frame
50 x 50 RHS




PSWS




With overhead rail

PSWSC



Viewed from secure side

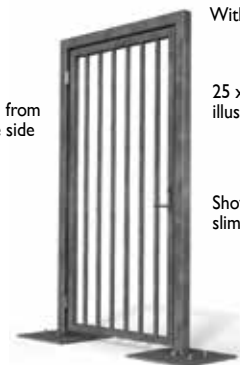


With overhead rail

25 x 25 RHS pickets illustrated

Shown with slimline mortice lock.

25 x 25 RHS pickets illustrated
> Refer to p76 for infill options



Pavement Surface

Lock Options					Auto Closer	Hot Dip Gal	Finish		
Padlock	Drop Bolt	Mortice	Magnetic	Electric			Powdercoat	Wet Spray	
Standard	Standard	N/a	N/a	N/a	N/a	Incl	Incl	Opt	
N/a	N/a	Optional	Optional	Optional	Optional	Incl	N/a	Opt	
Optional	Optional	Optional	Optional	Optional	Optional	Incl	N/a	Opt	
Optional	Optional	Optional	Optional	Optional	N/a	Incl	Incl	Opt	
Optional	Optional	Optional	Optional	Optional	Optional	Incl	Incl	Opt	

General 4

Bicycle Facts 4

Design Guide 6

Installation 12

Consulting 13

Security Classes 14

Products 16

Rails 16

Racks 35

Repair Stations 65

End-of-Journey 70

Cages 84

Lockers 88

Shelters 98

Domestic 107

Scooters 113

Other 116

Clothes Lockers 122

Codes Index 130